


DT120C/130C/150C/175C/190C PLOW BLADE ORDER FORM

NOTE: ADD 14" TO COVER DEPTH TO OBTAIN BLADE LENGTH.
STANDARD CHUTE LENGTH IS 8" LONGER THAN BLADE LENGTH.

NOTE: BLADES ARE
HARDFACED AS AN OPTION.

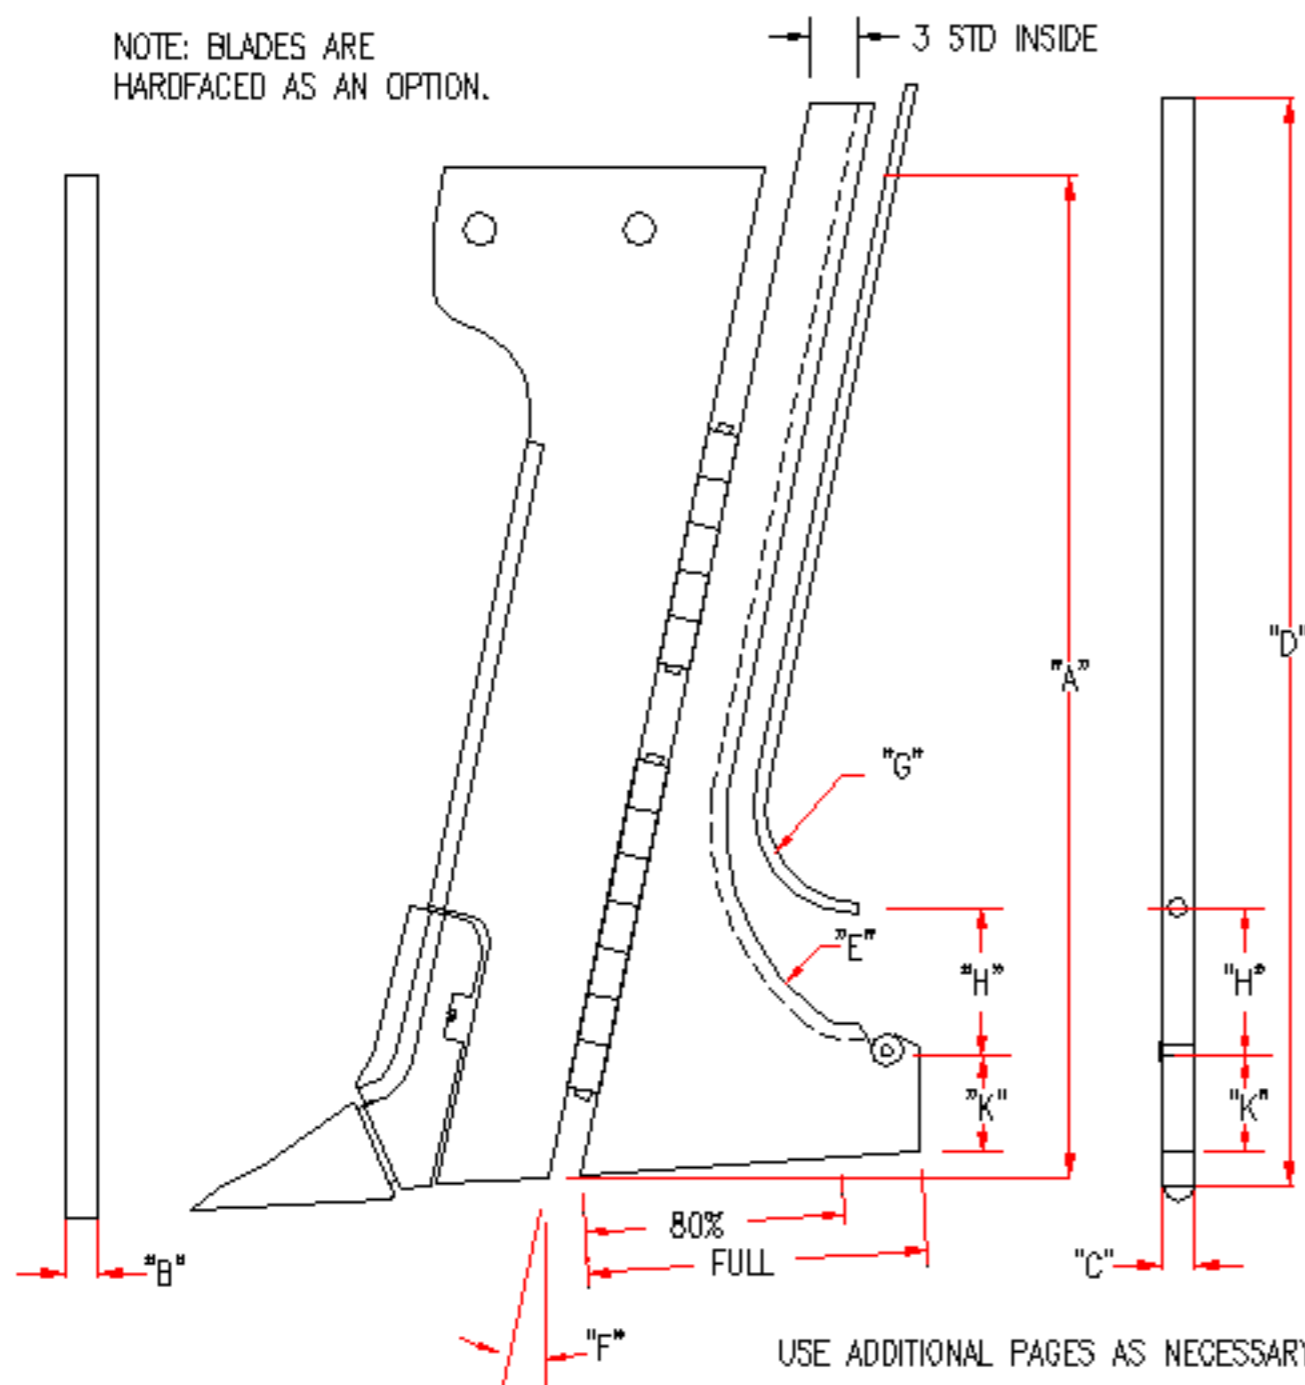

- "A" BLADE LENGTH**
- 53" OVERALL LENGTH 32" COVER
 - 57" OVERALL LENGTH 36" AVERAGE COVER
 - 62" OVERALL LENGTH 40" AVERAGE COVER
 - 70" OVERALL LENGTH 48" AVERAGE COVER
- (*ADD 9" TO COVER FOR SKIDS IN UP POS.)

DOWN POSITION*

- "B" BLADE THICKNESS**
- 1" OPTIONAL
 - 1-1/2" OPTIONAL
 - 2" STANDARD

"C" CHUTE INSIDE DIMENSION

- 1"
- 1-1/2"
- 2"
- 2-1/2"
- 3"
- 3"-1/2"
- 4-1/2"
- 5"
- SPECIAL _____

"D" CHUTE HEIGHT

- STANDARD 8" OVER BLADE
- OPTIONAL _____

"E" CHUTE RADIUS

- 15"
- 20"
- 30"
- 40"

"F" BLADE ATTITUDE ANGLE

- 12" STANDARD
- 20"

TOE CONFIGURATION

- REPLACEABLE SHIN & TOE
- STANDARD TOE

CHUTE CONFIGURATION

- HINGED CHUTE
- FIXED CHUTE
- SINGLE
- DOUBLE
- TRIPLE

INTENDED USE

- CABLE INSTALLATION
- GAS PIPE INSTALLATION
 - ROLLERS INCLUDED
 - NO ROLLERS

CHUTE BOTTOM

- FULL
- 80%

CABLE EXIT

- BACK
- BOTTOM

"G" WARNING TAPE TUBE

- YES
- NO
- HEIGHT "H" _____

"K" CHUTE OPENING

HEIGHT _____

COMPANY: _____

SIGNED BY: _____

PRINT NAME: _____

TELEPHONE: _____

PO # _____ DATE: _____

SPECIAL INSTRUCTIONS:

DELTA **EQUIPMENT, LLC**

3000 SIDNEY LANIER DRIVE (770) 963-9200

BRUNSWICK, GA 31525 FAX (770) 339-2931