


DT240 PLOW BLADE ORDER FORM

NOTE: ADD 14" TO COVER DEPTH TO OBTAIN BLADE LENGTH.
STANDARD CHUTE LENGTH IS 8" LONGER THAN BLADE LENGTH.

NOTE: BLADES ARE
HARDFACED AS AN OPTION.

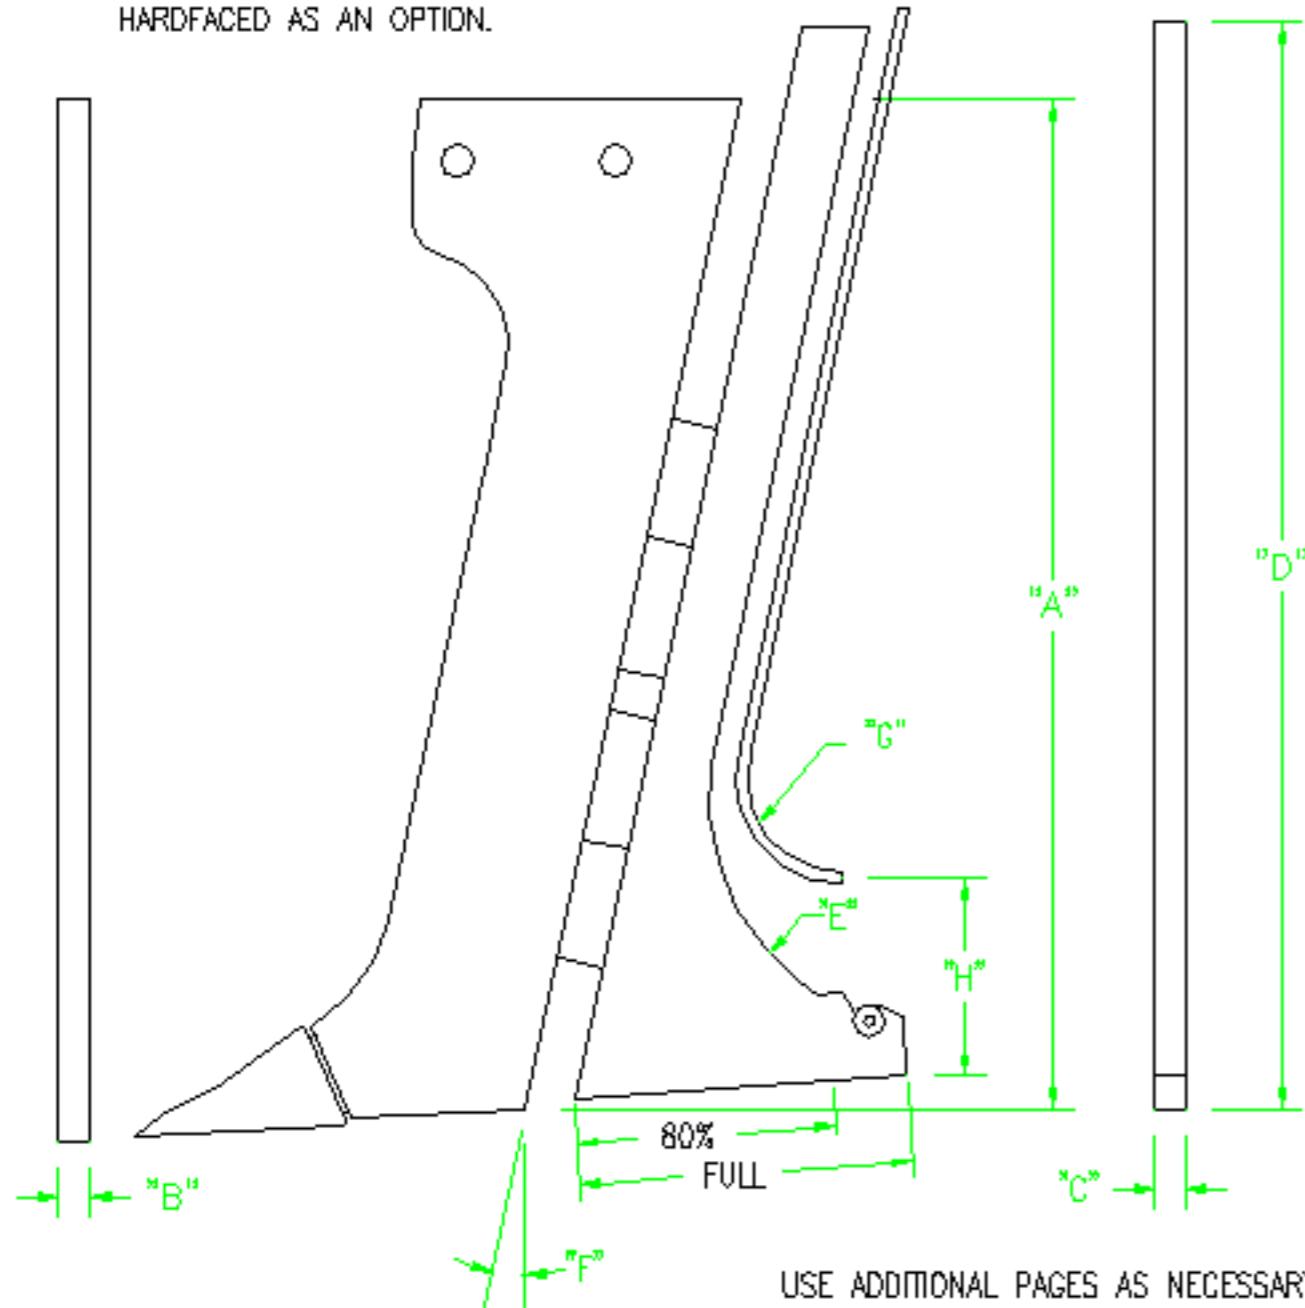

"A" BLADE LENGTH

- 53" OVERALL LENGTH 32" AVERAGE COVER
- 57" OVERALL LENGTH 36" AVERAGE COVER
- 62" OVERALL LENGTH 40" AVERAGE COVER
- 70" OVERALL LENGTH 48" AVERAGE COVER
- 75" OVERALL LENGTH 53" AVERAGE COVER
- 80" OVERALL LENGTH 58" AVERAGE COVER
- 85" OVERALL LENGTH 63" AVERAGE COVER
- 90" OVERALL LENGTH 68" AVERAGE COVER

"B" BLADE THICKNESS

- 1"
- 1-1/2"
- 2"

"C" CHUTE INSIDE DIMENSION

- 1"
- 1-1/2"
- 2"
- 2-1/2"
- 3"
- 3-1/2"
- 4-1/2"
- 5"
- SPECIAL _____

"D" CHUTE HEIGHT

- STANDARD 8" OVER BLADE
- OPTIONAL _____

"E" CHUTE RADIUS

- 15"
- 20"
- 30"
- 40"

"F" BLADE ATTITUDE ANGLE

- 12° (STANDARD)
- 20°

TOE CONFIGURATION

- REPLACEABLE TOE
- STANDARD TOE

CHUTE CONFIGURATION

- HINGED CHUTE
- FIXED CHUTE
- SINGLE
- DOUBLE
- TRIPLE

INTENDED USE

- CABLE INSTALLATION
- GAS PIPE INSTALLATION
 - ROLLERS INCLUDED
 - NO ROLLERS

CHUTE BOTTOM

- FULL
- 80%

CABLE EXIT

- BACK
- BOTTOM

"G" WARNING TAPE TUBE

- YES
- NO
- HEIGHT "H" _____

COMPANY: _____

SIGNED BY: _____

PRINT NAME: _____

TELEPHONE: _____

SPECIAL INSTRUCTIONS:

DELTA **EQUIPMENT, LLC**

3000 SIDNEY LANIER DRIVE (770) 963-9200

BRUNSWICK, GA 31525 FAX (770) 339-2931

PO #

DATE: